

DEMO (#9324)



VTX-240

Mercedes-Benz Sprinter 313 CDi

3,5t

With its two 3-stage telescopic booms, the VTX-240 can reach up and over obstacles - and the perfectly vertical lower boom will allow you to park right next to buildings.



REQUEST A QUOTE
+45 9863 2433 or sales@TIMEintl.dk

SPECIFICATIONS

1 / 1° max slope


Working height:	24,0 m
Outreach: at a 0° slope	12,5 / 10,7 / 9,0 / 8,3 m
Platform capacity:	80 / 120 / 200 / 220 kg
GVW:	3500 kg
Flyboom:	-
Wheelbase:	4325 mm
Insulation:	0 kV

FEATURES

Lift: PTO driven hydraulic pump system. Extendable H-frame outriggers (2 pairs) with LED flashes and footplates. End mounted aluminium platform (1400 x 700 x 1100 mm) with door, anti-slip floor, 2 x 90° platform rotator, 230V outlet and LED flash. FPC: Full Proportional CANbus controls with auto setup and packing. Load sensor. Emergency hand pump. Aluminium rear platform.

Vehicle: Mercedes-Benz Sprinter 313 CDi. 129 BHP diesel engine. 6 speed manual transmission. Euro 5B. CD/Radio. Electric windows. "Arctic white".

REACH DIAGRAM

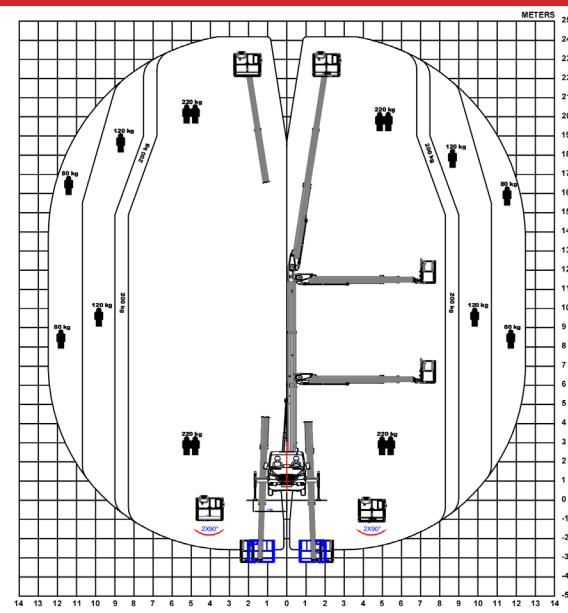

Subject to change without notice

DEMO (#9324)



VTX-240

Mercedes-Benz Sprinter 313 CDi

3,5t

With its two 3-stage telescopic booms, the VTX-240 can reach up and over obstacles - and the perfectly vertical lower boom will allow you to park right next to buildings.



SELECTED FEATURES



Extendable H-frame outriggers with auto levelling in wide or narrow jacking



Aluminium rear platform with steps to the platform



Perfectly vertical lower boom and horizontal upper boom. Flexible knuckle



2 x 90° platform rotation. 420° non continuous turret rotation



6 cm ground clearance of platform for close access to the ground, flat rooftops etc.



FPC: Full Proportional CANbus controls with auto setup and packing